

LED Down Light-Bluetooth Control 3" 10W CCT & brightness dimmable

LED DOWN LIGHT




Bluetooth Control

Product feature

- ◆ Adopted high quality Hongli LED with CRI 80. lumens of natural white up to 900Lm, and of warm white up to 850Lm.
- ◆ With your Bluetooth activated smart Phone, it's completely dimmable, and you can select any colour between 3000K and 5000K.
- ◆ CE/EMC/LVD/SAA/C-tick approved built-in driver with PFC>0.9, easy for installation.

Model Number	Power Consumption	LED	CRI	Efficiency (lm/W)	Color Temperature	Beam Angle	Input Voltage	PFC	Light Intensity	Lumens	Dimmable
D3010VF-DIM	10W	SMD	80	85	2700±200K 3000±200K	90°	220-240VAC	>0.9	380 cd	850lm	YES
		SMD	80	88	4000±200K	90°	220-240VAC	>0.9	410 cd	880lm	YES
		SMD	80	90	5000±200K 6000±200K	90°	220-240VAC	>0.9	450 cd	900lm	YES

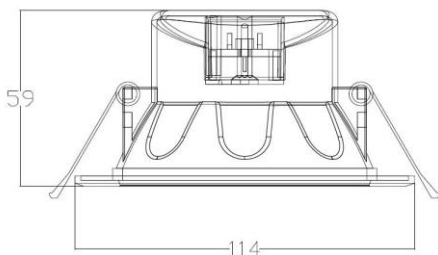

Application

- Area: Indoor use only.
- Purpose: Accent lighting, local lighting.
- General lighting
- Hotel
- Hall / Lobby
- Jewelry store
- Theater
- BAR/Restaurant
- Store
- Art gallery
- Museum
- School

LED Down Light-Bluetooth Control


3" 10W D3010VF-BT

General characteristics

Model Number	Product name	Material	Driver	IP Rating	Dimension (mm)	Cut size(mm)	Net Weight	Lifetime (hr)	Working Temperature
D3010VF-BT	LED Down Light	Aluminum + PC	Internal	IP44	Φ114x59	92-105	280g	25000	-5°C ~ +35°C





Packaging information

Packing: 42 PCS / carton		
Box	125×125×95(mm)	280 g
Carton	62×39×30(cm)	12.50 kg

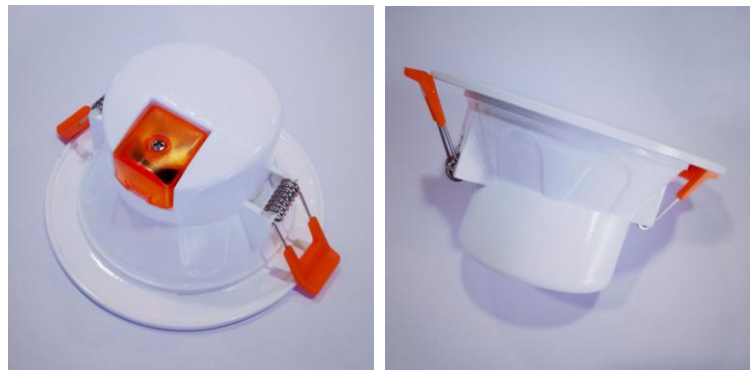

D3010VF-BT 3000K 90°

D3010VF-BT 5000K 90°

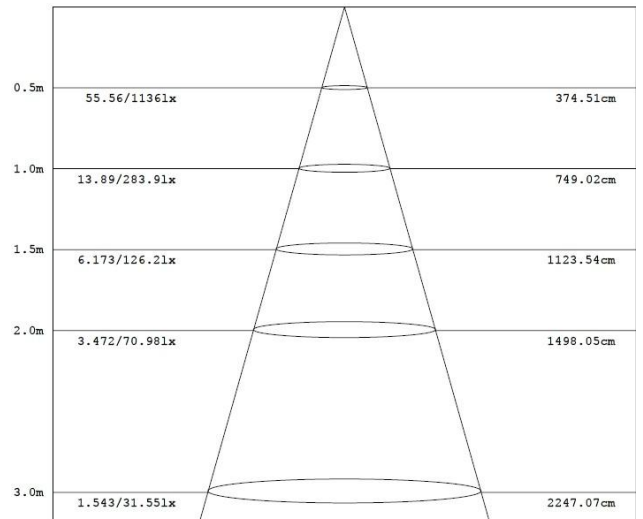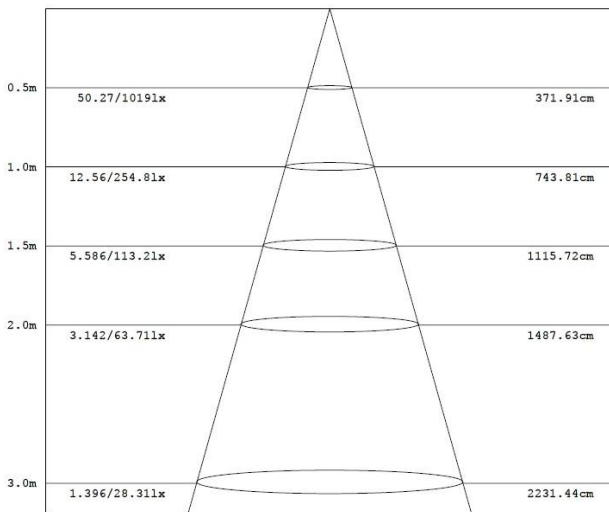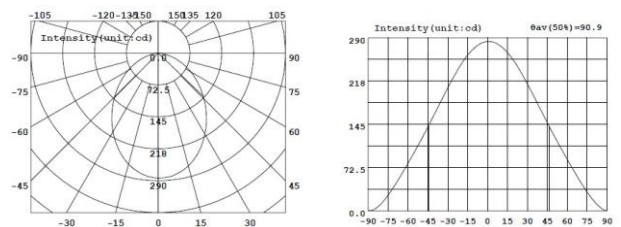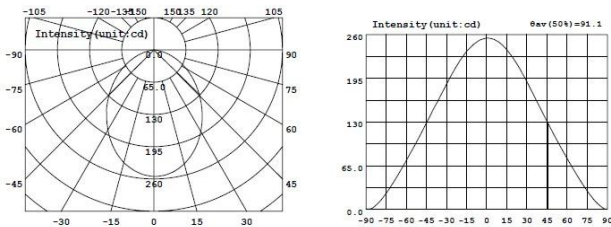


Height Lux Diameter

Height Lux Diameter

LED Down Light-Bluetooth Control 3" 10W D3010VF-BT

Installation instruction

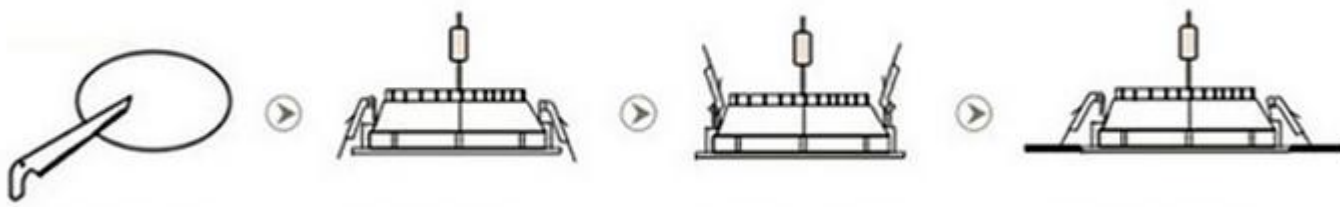

Cut a suitable hole in ceiling → connect power cord well → insert down light → release spring clasp



Important Caution

1. Not suitable for high temperature and moisture area.
2. Not suitable for heavy air-polluted area.
3. Not suitable for close system fixture.